

# RONDINE S.p.A.

## DECLARATION OF PERFORMANCE N° 001CPR2013-07-14

1. Identification of the product: **Dry-pressed ceramic tiles, with water absorption E ≤0,5%**
2. Intended use: **for internal and external walls and floorings**
3. Name and contact of the manufacturer: **Rondine S.p.A. Via Emilia Ovest, 53/A 42048 Rubiera (RE) Italia**
4. System of assessment and verification of constancy of performance (AVCP): **System 3 and 4**
5. Notified laboratory: **Modena Centro Prove s.r.l. – Via Sallustio n° 78 Modena (MO) Italy. Identification number 1599**
6. **Declared performances:**

| Essential characteristics   |                                     | Performance  | Harmonised technical specification |
|---|-------------------------------------|--|------------------------------------|
| <b>Reaction to fire</b>   |                                     | A1fl/A1  | EN 14411:2012                      |
| <b>Release of dangerous substances, for:</b><br>- Cadmium<br>- Lead               |                                     | NPD  |                                    |
| <b>Breaking strength</b>  |                                     | ≥ 1300N  |                                    |
| <b>Slipperiness</b>   | <b>DIN 51130</b>                    | R10<br>R11 (Strong)  |                                    |
|   | <b>ASTM-C 1028</b>                  | R10: Dry 0,61 – Wet 0,62<br>R11 (Strong) Dry 0,72 – Wet 0,72 |                                    |
|   | <b>D.M. 236 - 89<br/>Rif.B.C.R.</b> | R10: Asciutto 0,45 – Bagnato 0,62                            |                                    |
| <b>Tactility</b>  |                                     | NPD  |                                    |
| <b>Bond strength/adhesion, for:</b><br>In conformity with Standard 12004          |                                     | ≥ 0,5 N/mm <sup>2</sup>                                      |                                    |
| <b>Thermal shock resistance</b>   |                                     | Passed   |                                    |
| <b>Durability for:</b><br>-internal use:<br>-external use: freeze-thaw resistance |                                     | Passed   |                                    |

The performance of the product identified in point 1 is in conformity with the declared performances in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.


Signed for and behalf of the manufacturer by:

Lauro Giacobazzi - CEO

Name and function

Rubiera, 01/07/2013

Place and date of the issue

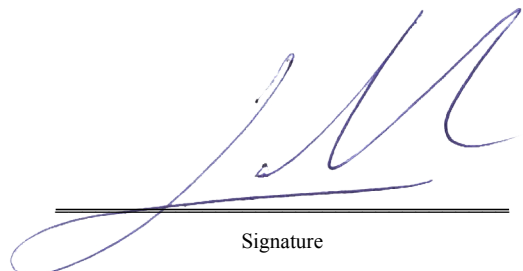

Signature